



SSL-34AC

SOLAR PANEL

POWER 40W

Li-ION BATTERY

CAPACITY 14.8V/269.36WH

CHARGIN/DIS TEMP -10°C 60°C

CHARGING TIME 7.8H

ED (OSRAM) 3030/40PCS

COLOR TEMP 5700K/A>70

EFFICIENCY 230LM/W

AC ADAPTER

TENSION 16V

COURANT 2A

PERFORMANCE

CYCLES 1500

IP / IK CLASS IP66/ IK08

DISTANCE 4M / 15M

PIR 120°, 8M.MAX

CORE TECHNOLOGY ALS2.4


TYPES OF LIGHTING TYPE 2

CARACTERISTICS


DIMENSION MM 1440*370*495

MATERIAL ALUMINIUM & PC


SSL-34AC

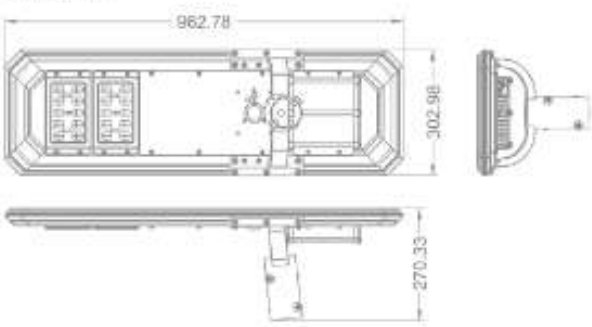

Road Simulated Diagram

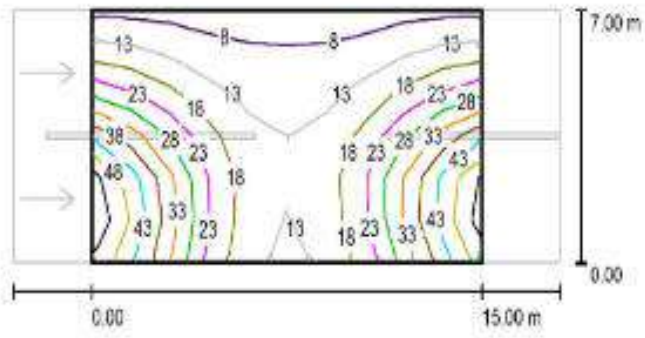

Luminance Distribution

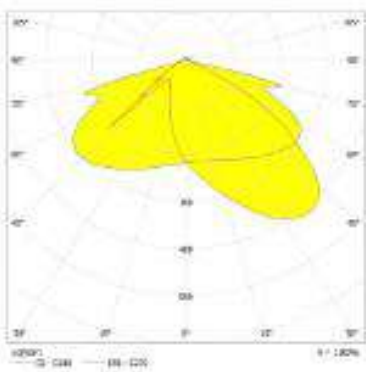

Illumination Curve

